



FELICIA

创新 / 合作 / 共赢

Fuel Water Separator

FWS 系列 油水分离器



FELICIA

上海总部

✉ mike@yfstart.com
☎ +86-21-59283219
🌐 <http://www.51starter.com>
📍 上海市青浦区盈顺路870号2号楼505室
Room 505, Building 2, No. 870, Yingshun Road,
Qingpu District, Shanghai, China.

芜湖总部


✉ mike@yfstart.com
☎ +86-18817887163
🌐 <https://www.yfstart.com>
📍 芜湖市鸠江区中南高科芜湖鸠江智造云谷产业园7-2栋
Building 7-2, Zhongnan Gaoke Wuhu Jiujiang Zhizao Cloud
Valley Industrial Park, Jiujiang District, Wuhu City, China.



雨凡机械科技(上海)有限公司
YuFan Machinery Technology(Shanghai) Co., LTD.

FELICIA FWS系列油水分离器

FELICIA燃油油水滤清器是燃油过滤系统的正确选择，已经通过测试和验证能帮助节省燃料，减少维修费用和延长发动机使用寿命。

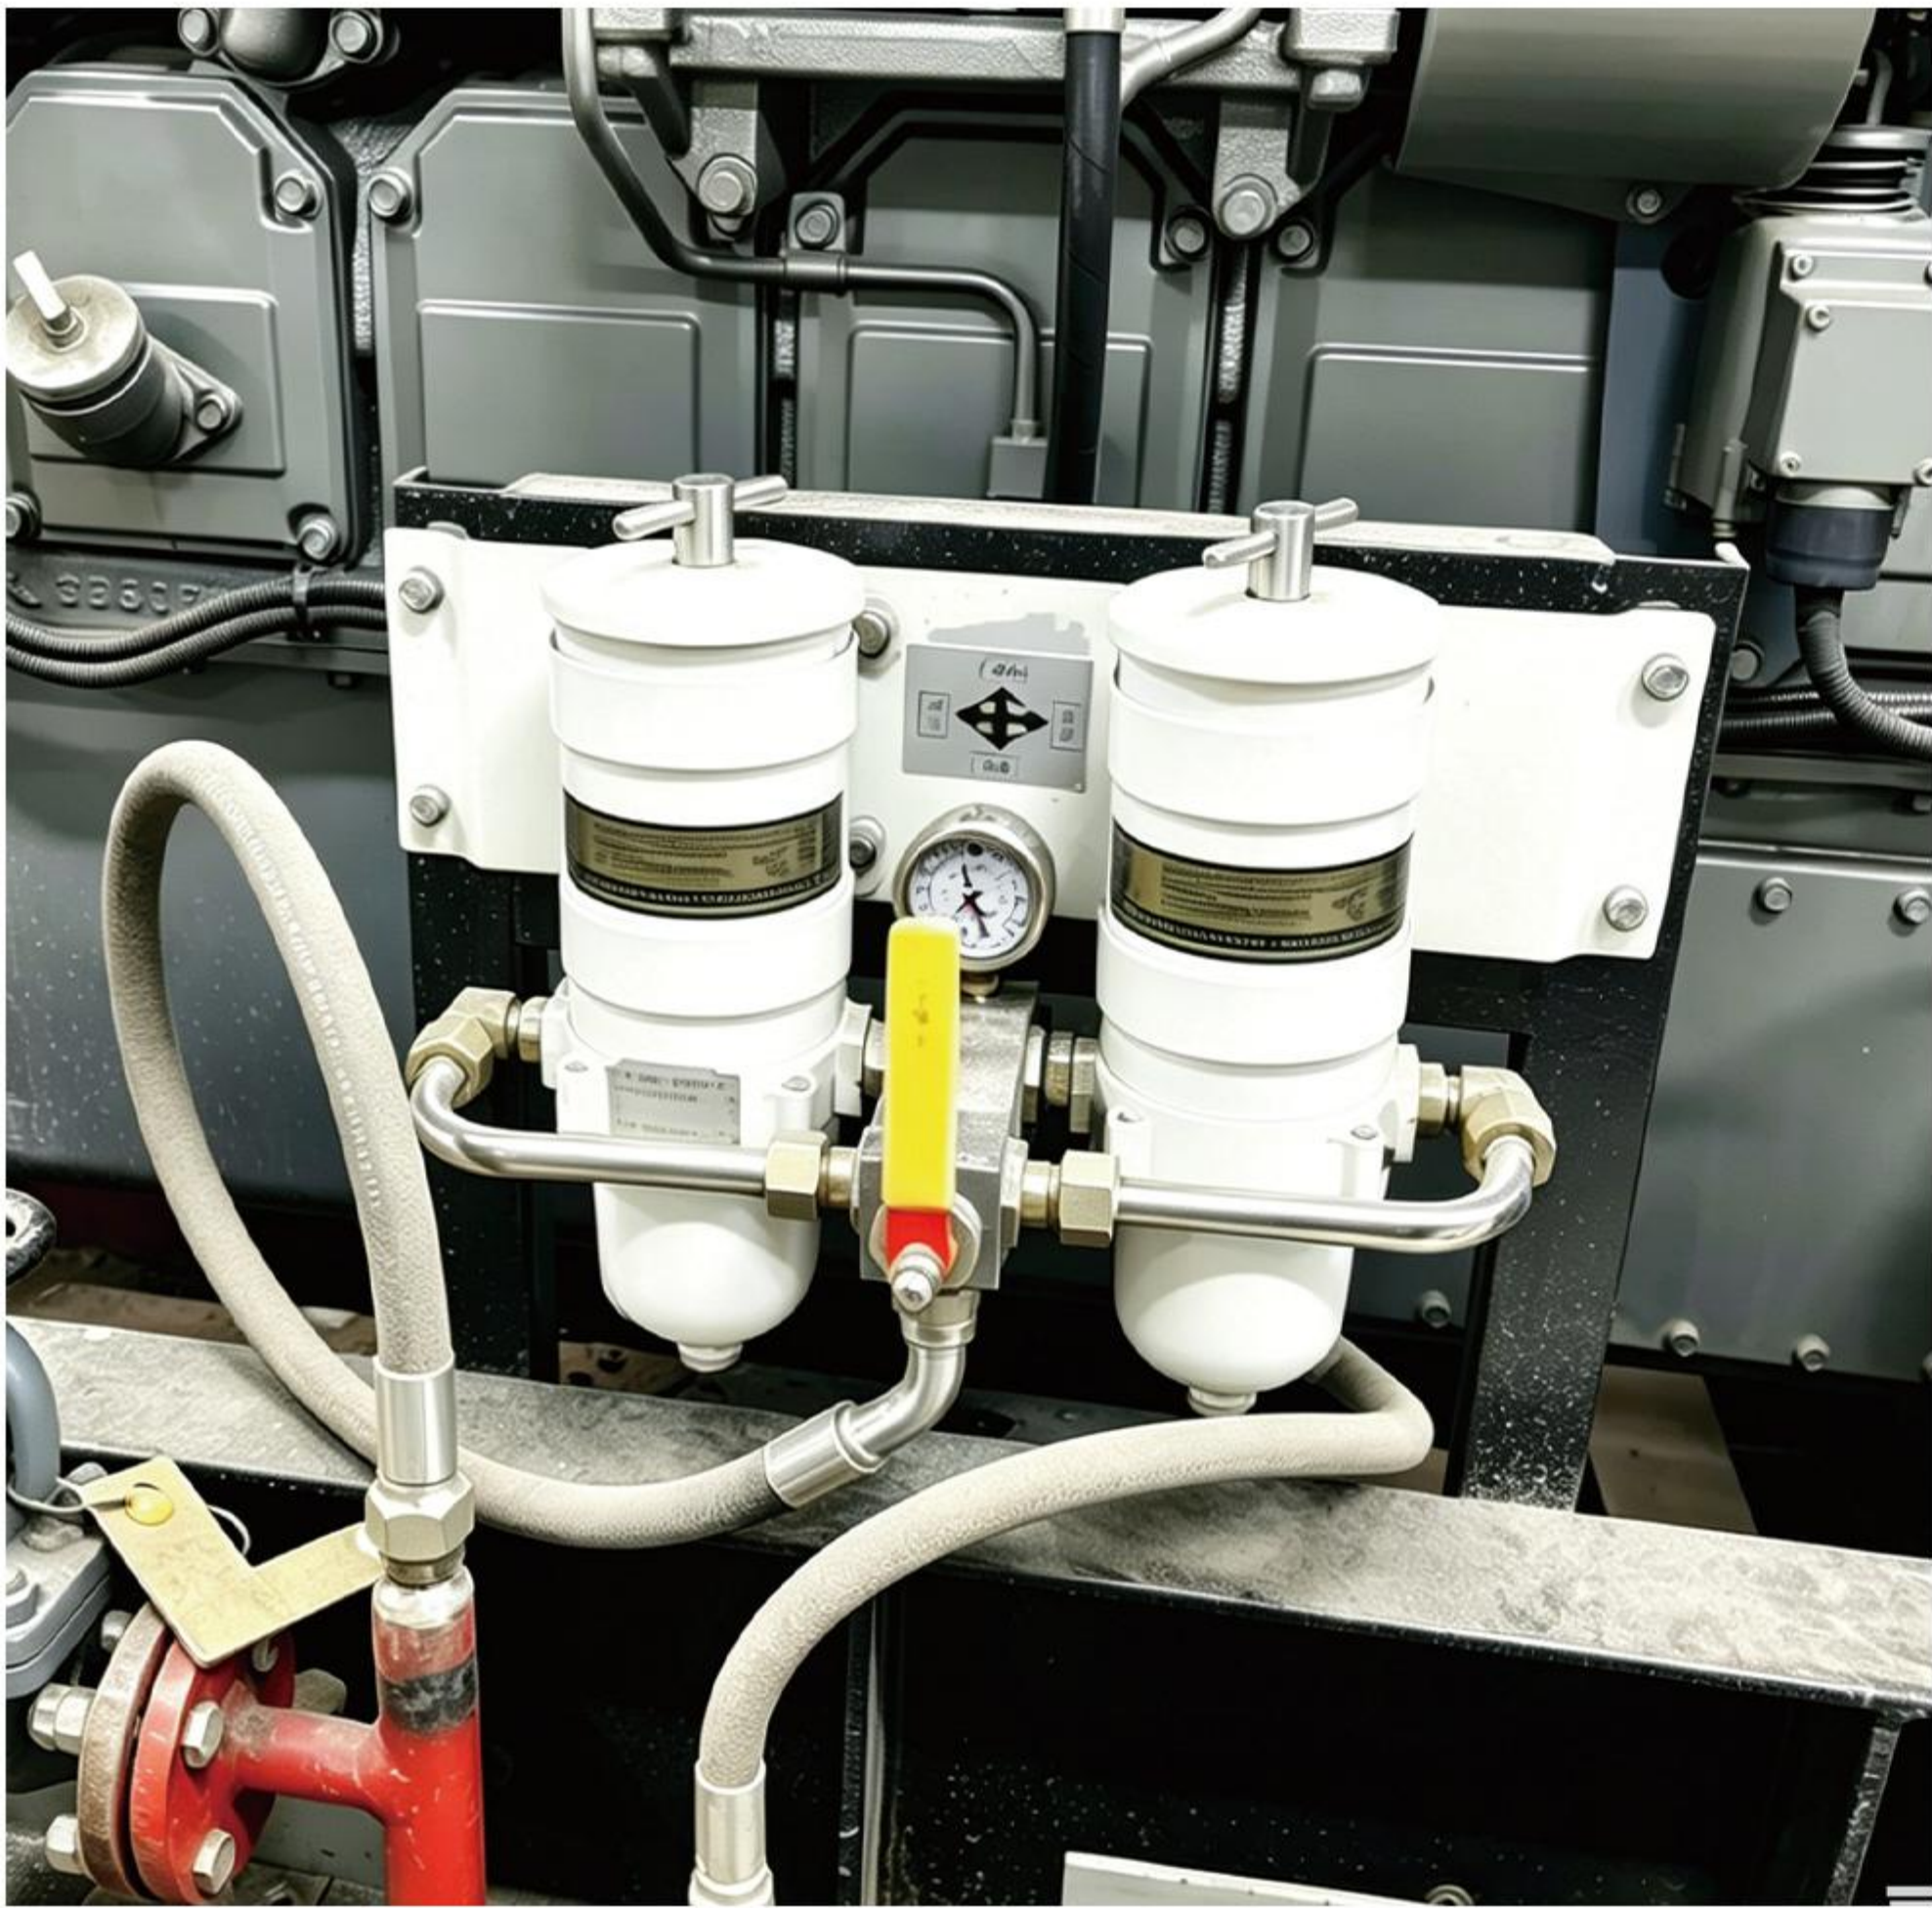

超高水分离

99.8% 水分离效率，保护高压共轨喷油系统。



高效过滤

深层滤材拦截微米级杂质，减少喷油嘴磨损。



低阻大流量

优化流道设计，压力降低，满足大流量供油需求。



坚固耐用

金属壳体 + 长效密封，适应振动、高温、潮湿工况。




易维护

透明集水杯（可选）+ 放水阀，直观观察水位、快速排水。



FWS341-SL(单联)

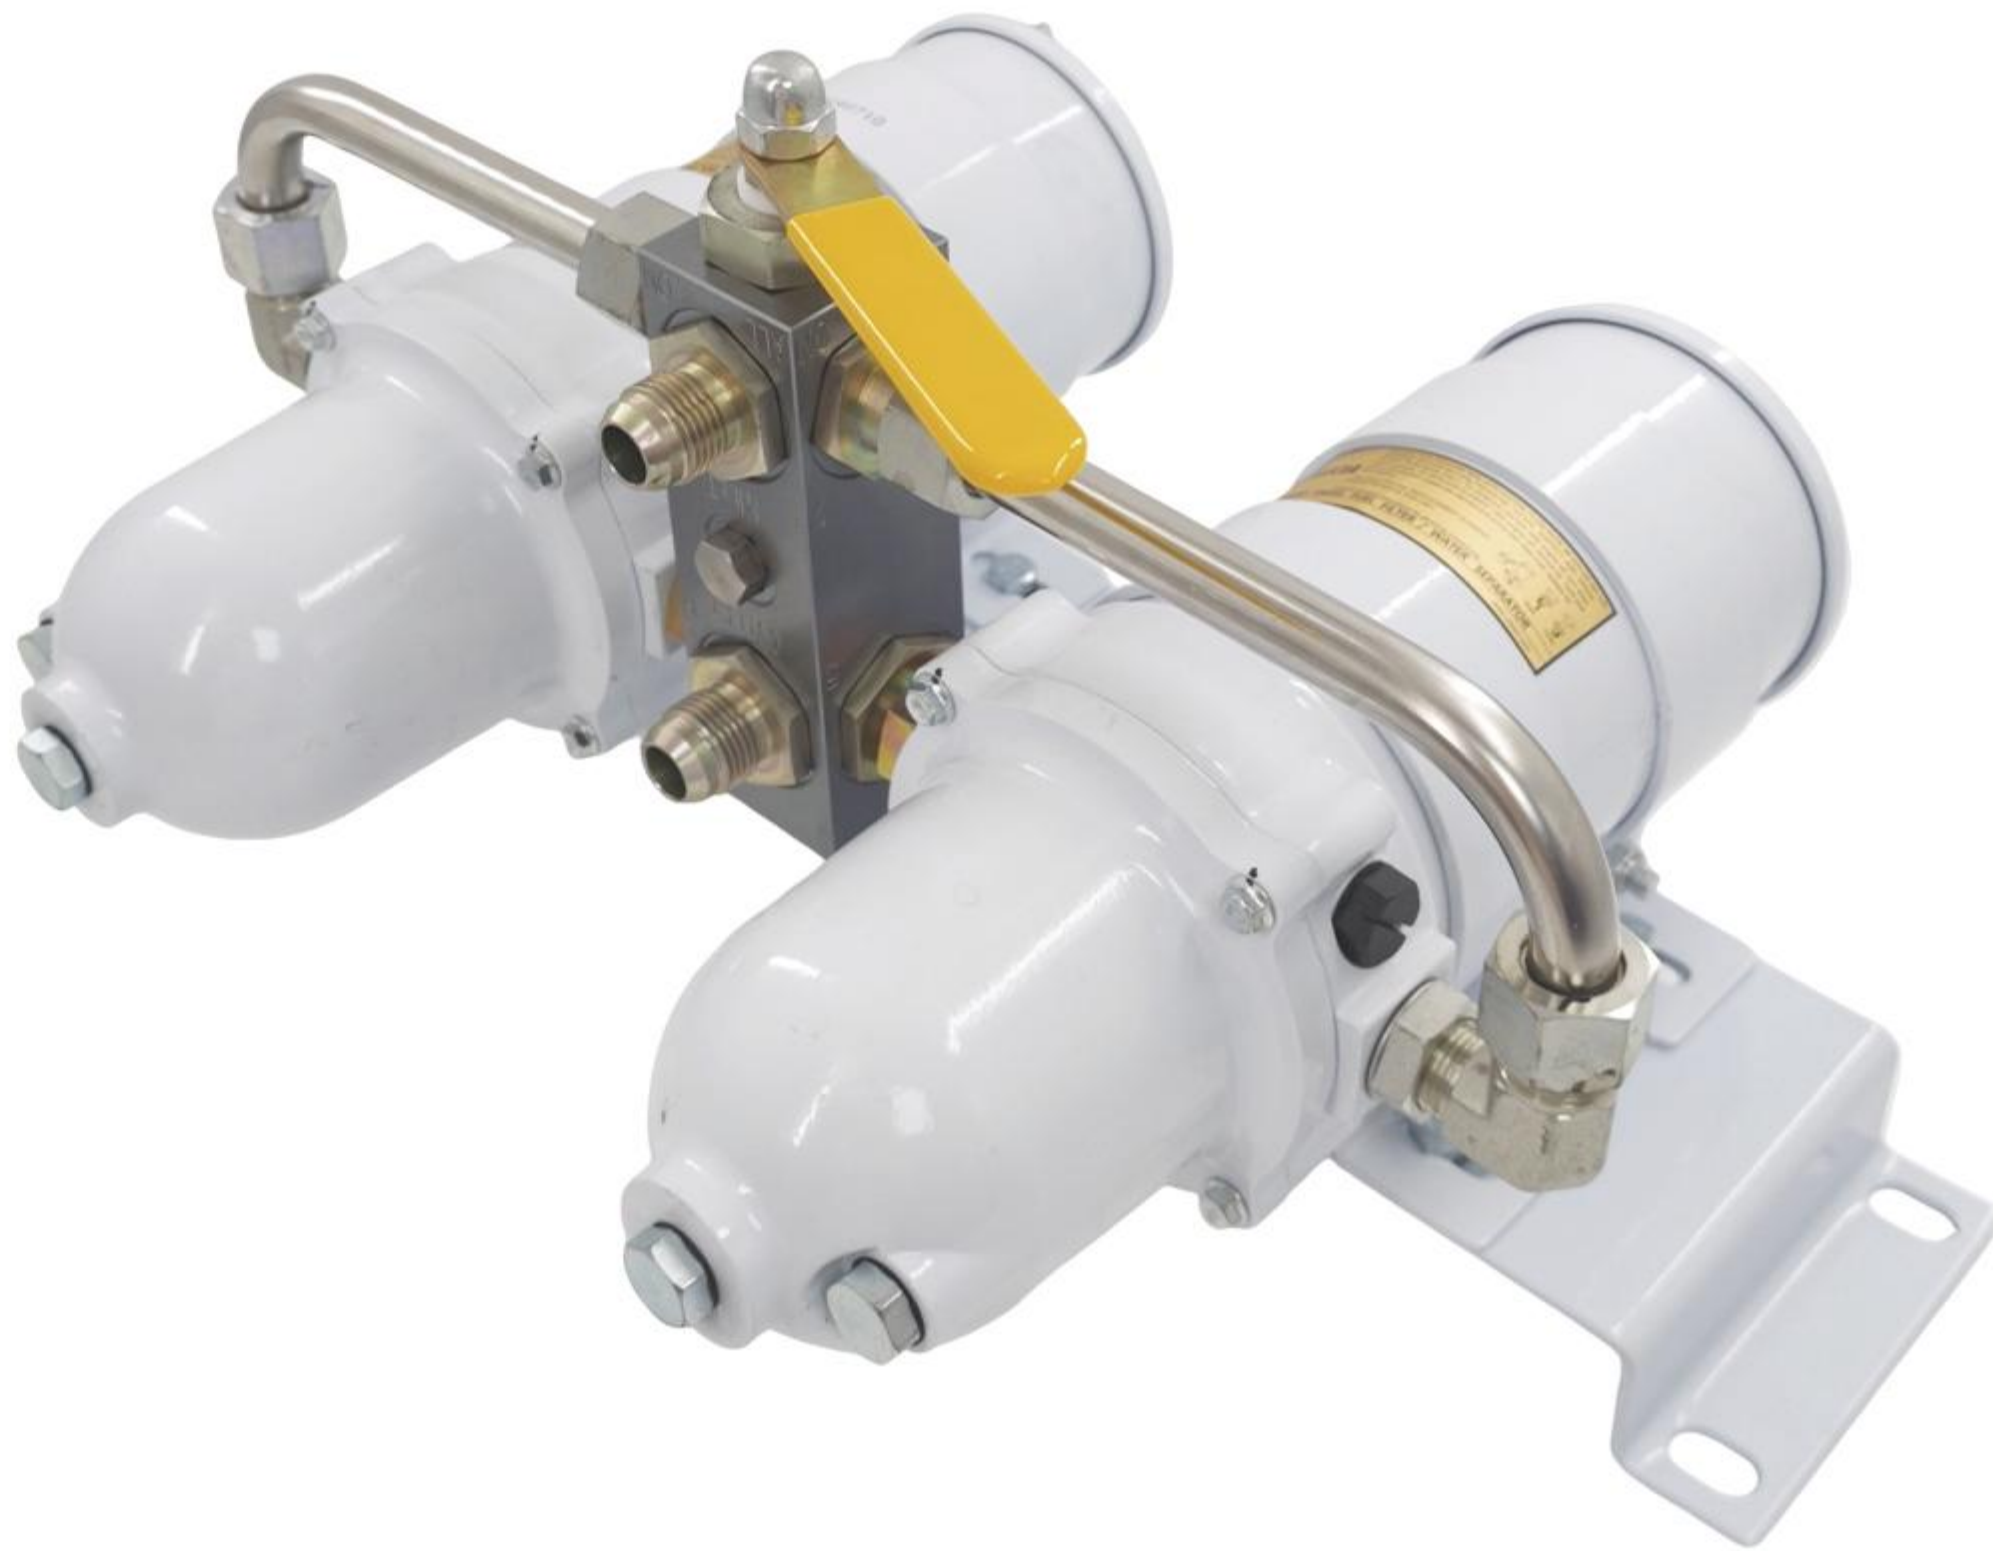

FWS341-DL(双联)



FWS681-SL(单联)




FWS681-DL(双联)



	FWS341-SL(单联)	FWS341-DL(双联)	FWS681-SL(单联)	FWS681-DL(双联)
进口油孔	7/8-14"UNF			
流量	341LPH/90GPH	681LPH/180GPH	681LPH/180GPH	1363LPH/360GPH
操作空间	127MM		254MM	
净重量	3.2KG	10.5KG	3.3KG	13.5KG
温度	-20°C/+120°C			
清洁压力降	2.4KPA	11.7KPA	3.3KPA	25.5KPA
最大使用压力	103KPA			

FELICIA FWS Fuel Water Separator

The FELICIA fuel and water filter is the right choice for your fuel filtration system. It has been tested and proven to help save fuel, reduce maintenance costs, and extend engine life.

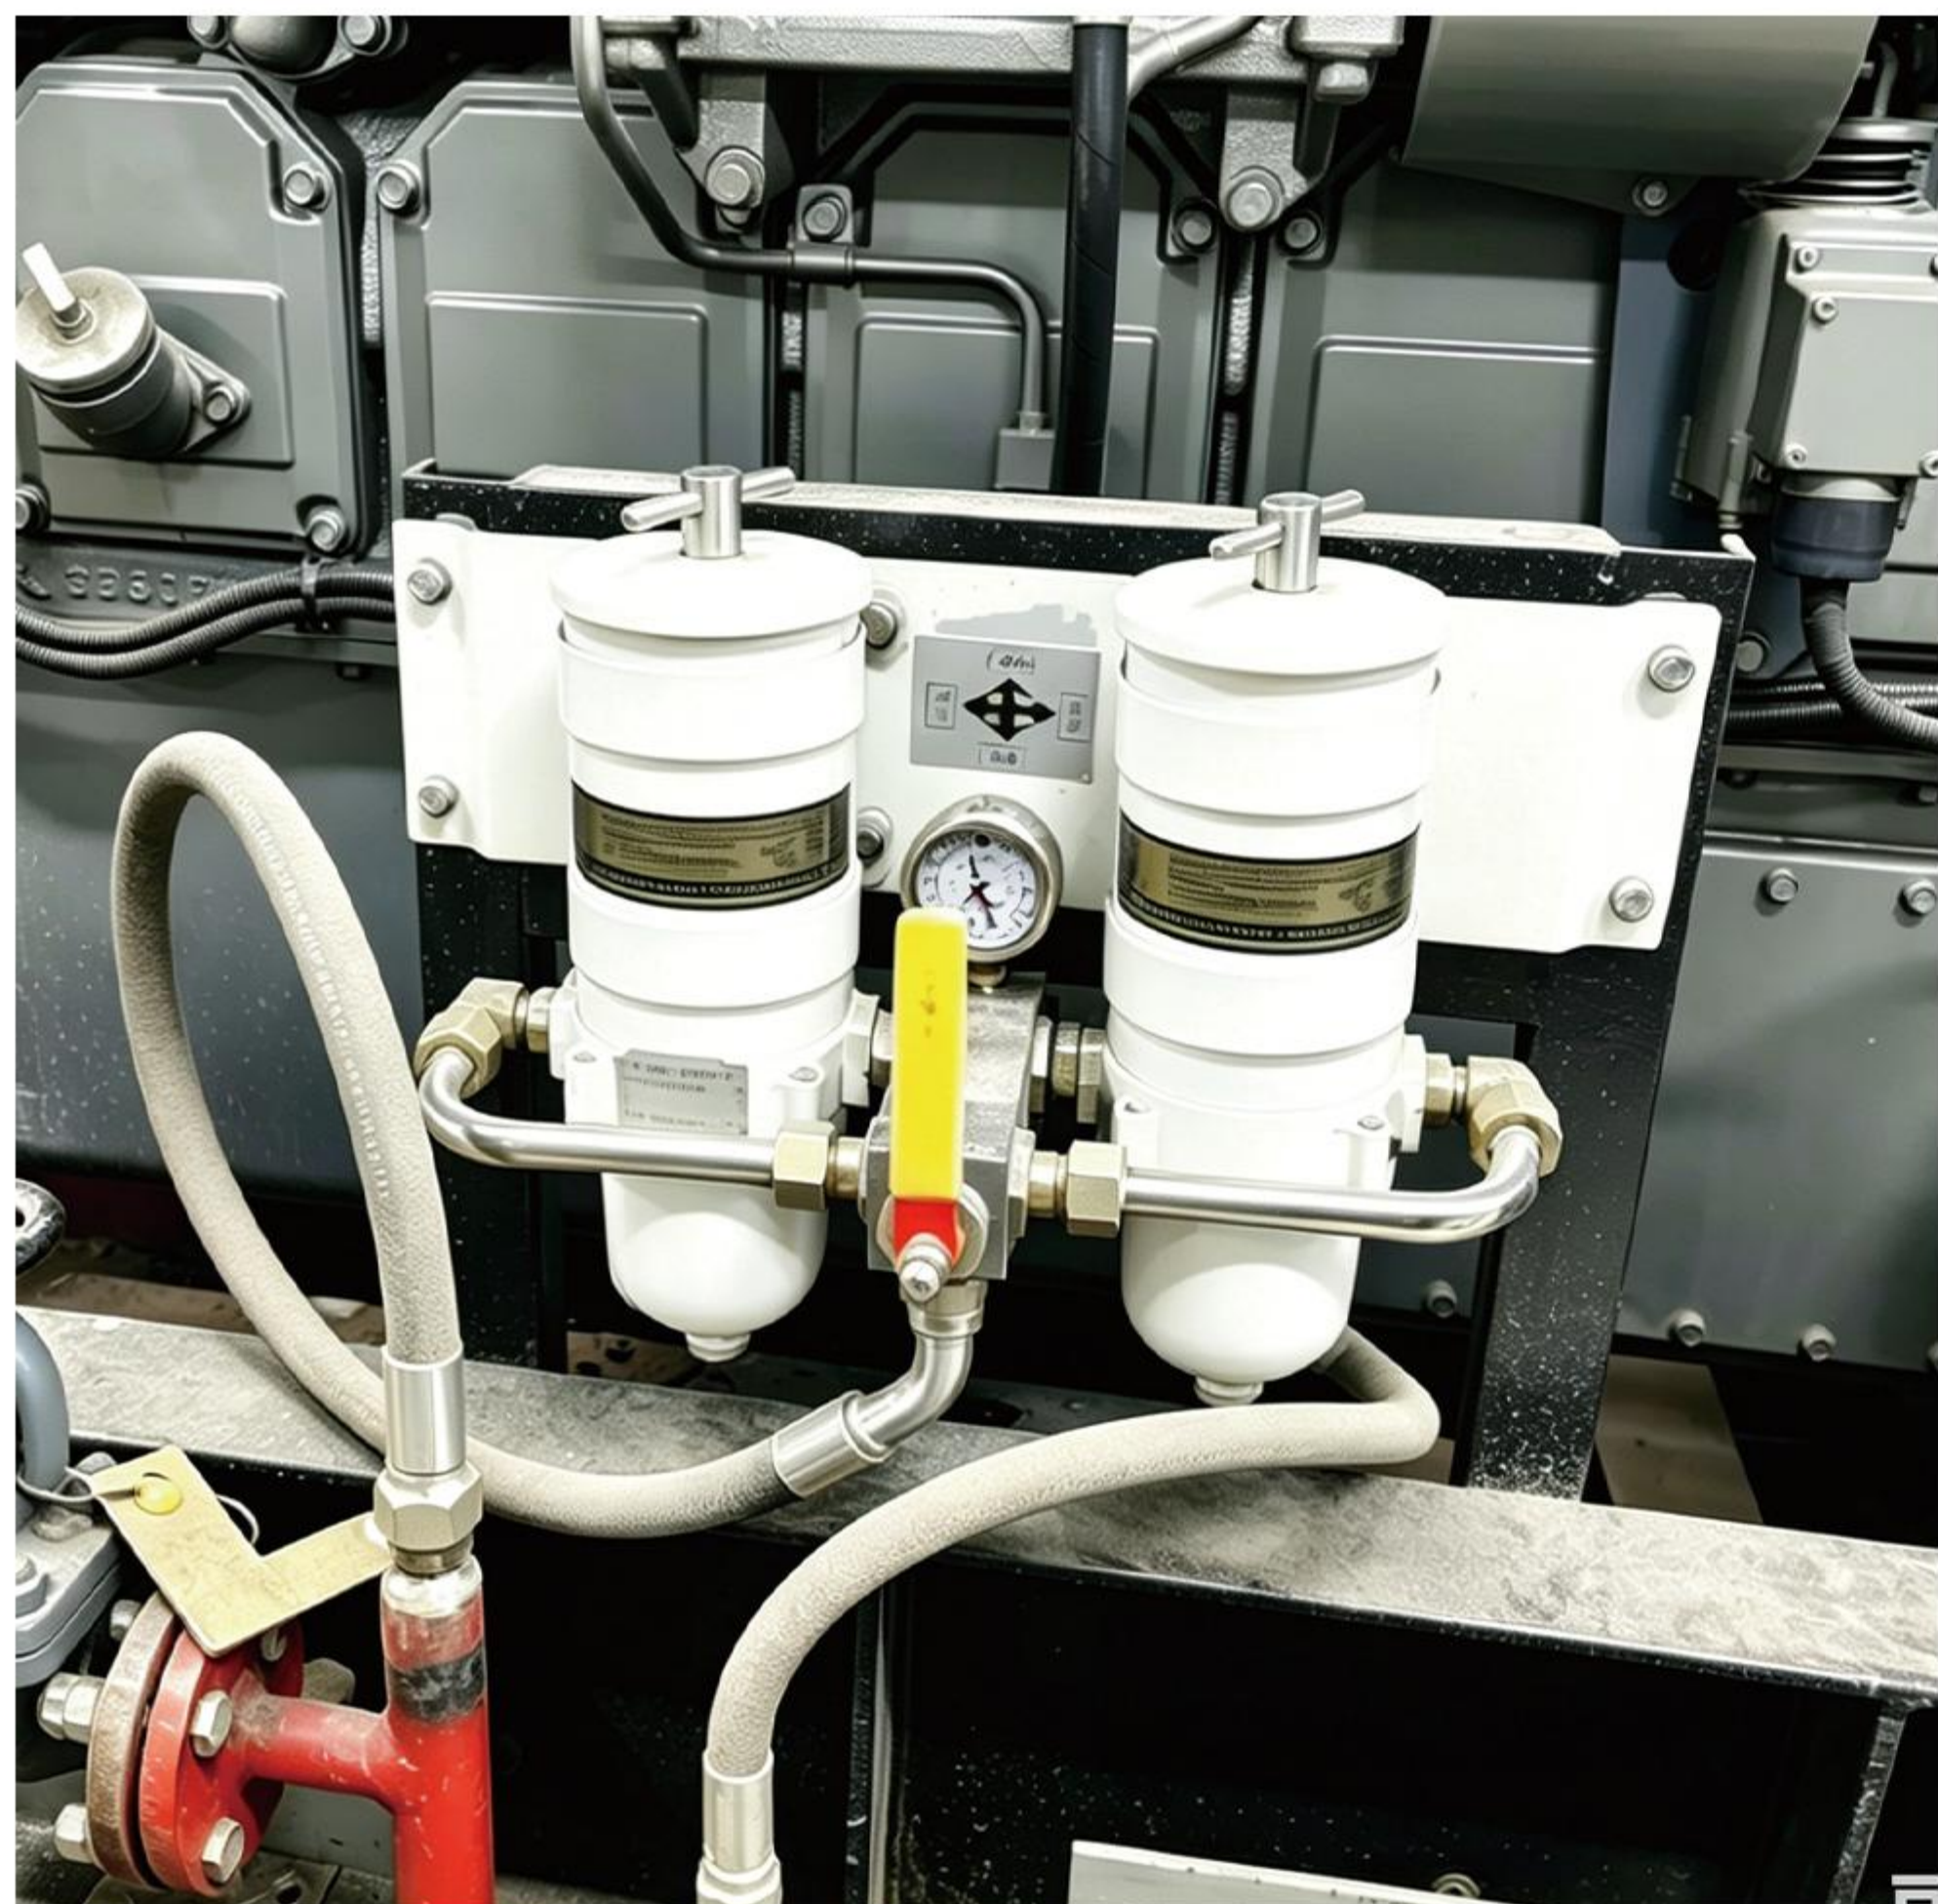

- 

Ultra-high-moisture separation
99.8% water separation efficiency, protecting the high-pressure common-rail fuel injection system.
- 

High-efficiency filtration
Deep-bed filter media trap micron-sized impurities, reducing wear on the fuel injectors
- 


Low resistance and high flow rate
Optimized flow path design reduces pressure and meets high-flow oil supply requirements.
- 

Durable
Metal housing + long-lasting seals, designed to withstand vibration, high temperatures, and humid conditions.
- 

Easy to maintain
Transparent water collection cup (optional) + drain valve, for easy monitoring of water level and quick drainage.



FWS341-SL(Single Circuit)

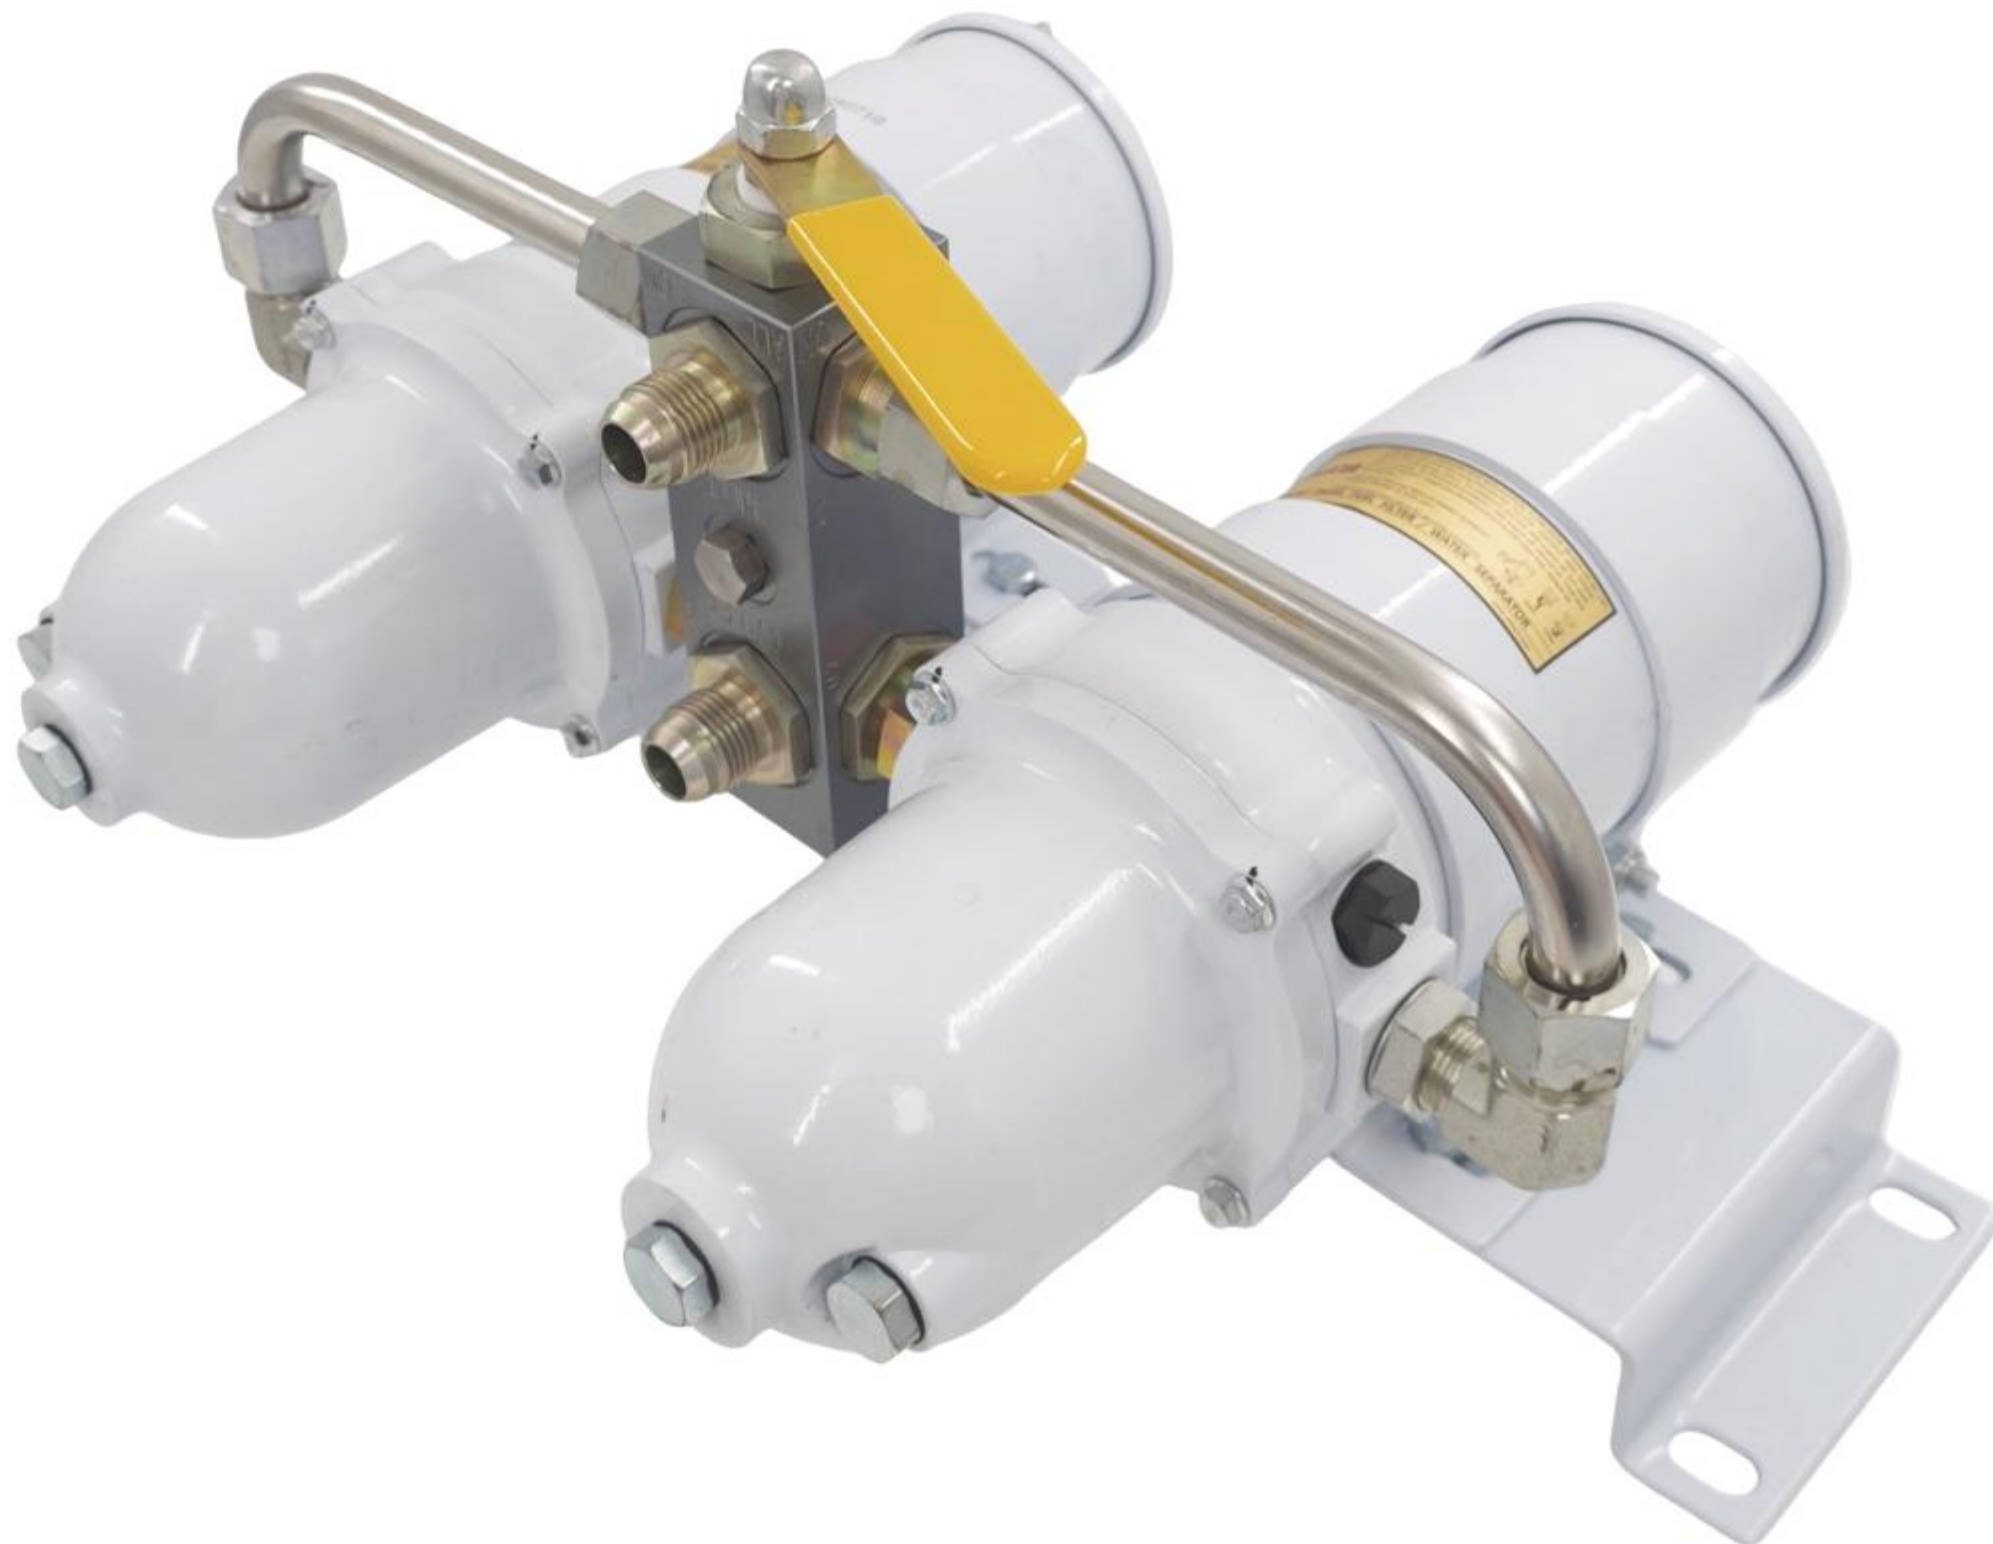

FWS341-DL(Dual Circuit)



FWS681-SL (Single Circuit)



FWS681-DL(Dual Circuit)



	FWS341-SL	FWS341-DL	FWS681-SL	FWS681-DL
Inlet port	7/8-14"UNF			
Traffic	341LPH/90GPH	681LPH/180GPH	681LPH/180GPH	1363LPH/360GPH
Operating space	127MM		254MM	
Net weight	3.2KG	10.5KG	3.3KG	13.5KG
Temperature	-20°C/+120°C			
Cleaning pressure drop	2.4KPA	11.7KPA	3.3KPA	25.5KPA
Maximum operating pressure	103KPA			